PHONE: 516.328.3300 • FAX: 516.326.8827 • WWW.SDP-SI.COM

ECONOMIC ALTERNATIVE
TO MINIATURE STEEL CHAIN
TWIN CORE

Inch
0 1

› MATERIAL:

Body - Molded Polyurethane
Core - Aramid Fiber or Stainless Steel

› SPECIFICATIONS:

Operating Temperature Range:
-10°F to +140°F

BELT DATA

Belt Core	Belt Core Code	Min. No. of Teeth in Mesh	Min. Pulley Dia. in.	Max. Belt Operating Speed No Load/Load ft./min.	Max. Operating Belt Tension lbf
Aramid	AFT	6	.750	1300/550	10
Steel	SST			1300/700	20

These belts are **also sold by the foot**, in **continuous lengths** up to 100 feet.

Catalog Number	Belt Core
S7915Y-CPAFT	Aramid Fiber
S7915Y-CPSST	Stainless Steel

CORE:
SS, STAINLESS STEEL FOR LOWEST STRETCH & HIGHEST SPEED...OR **AF**, ARAMID FIBER FOR HIGHEST FLEXIBILITY

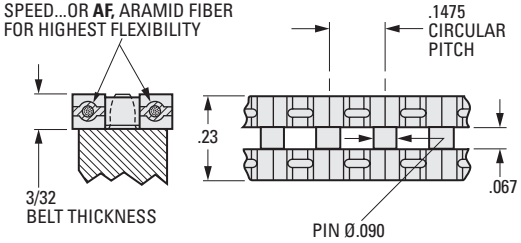

INCH COMPONENT CATALOG NUMBER

S 7 9 1 5 Y – C P □ □ □ □ □ □

Aramid Fiber Core **AFT**
Stainless Steel Core **SST**
No. of Drive Pins

Example: S7915Y-CPSST040 is a 40 Pin Stainless Steel Core Drive Belt.

No. of Drive Pins	Pitch Length
040	5.900
050	7.375
060	8.850
070	10.325
080	11.800
090	13.275
100	14.750
110	16.225
120	17.700
130	19.175
140	20.650
150	22.125
160	23.600
170	25.075
180	26.550
190	28.025
200	29.500
210	30.975

No. of Drive Pins	Pitch Length
220	32.450
230	33.925
240	35.400
250	36.825
260	38.350
270	39.825
280	41.300
290	42.775
300	44.250
310	45.725
320	47.200
330	48.675
340	50.150
350	51.625
360	53.100
370	54.575
380	56.050
390	57.525

©Copyright 2018 Stock Drive Products / Sterling Instrument, a Designatronics company. All rights reserved.