

SET SCREW TYPE HUBS
 MOLDED NEOPRENE CENTER
 SHAFT-TO-SHAFT INSULATION
 TORSIONAL VIBRATION ISOLATION

PHONE: 516.328.3300 • FAX: 516.326.8827 • WWW.SDP-SI.COM



➤ MATERIAL:

Hubs - 303 Stainless Steel
 Center - Molded Neoprene, Durometer 73


➤ MISALIGNMENT COMPENSATION:

Ribbed Style - Max. Angular Offset: 15°
 Max. Lateral Offset: .015
 Smooth Style - Max. Angular Offset: 8°
 Max. Lateral Offset: .010


➤ SPECIFICATION:

Bore Size	Max. Torque ozf in.
.1200	100
.1248	120
.1873	150
.2498	180

Other bore sizes and combinations available on special order.

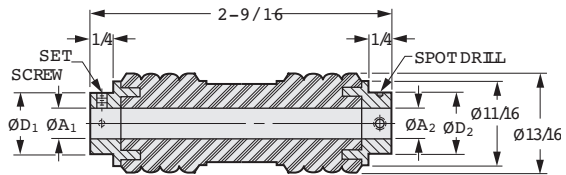

Ribbed Style

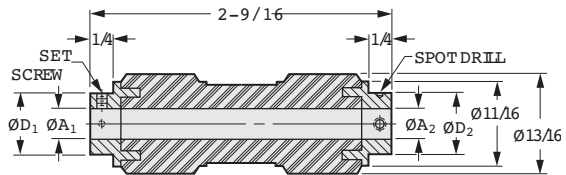

Smooth Style

INCH COMPONENT

Catalog Number		A ₁ Bore +.0005 -.0000	A ₂ Bore +.0005 -.0000	D ₁ Hub Dia.	D ₂ Hub Dia.	Set Screw			
Ribbed Style	Smooth Style								
S50PLR-0303	S50PLS-0303	.1200	.1200	5/16	5/16	#2-56			
S50PLR-0304	S50PLS-0304		.1248						
S50PLR-0404	S50PLS-0404		.1248		.1873	3/8	#2-56 / #4-40		
S50PLR-0406	S50PLS-0406	.1248	.1873						
S50PLR-0408	S50PLS-0408	.1248	.2498	1/2	#2-56 / #6-32				
S50PLR-0606	S50PLS-0606	.1873	.1873	3/8	3/8	#4-40			
S50PLR-0608	S50PLS-0608		.1873				.2498	1/2	#4-40 / #6-32
S50PLR-0808	S50PLS-0808		.2498				.2498		