MXL, XL, GT®2, & HTD® TIMING BELT CLAMP KITS

SDP/SI

PHONE: 516.328.3300 • FAX: 516.326.8827 • WWW.SDP-SI.COM

FOR RECIPROCATING DRIVES
PATENT NO: US 7,810,219 B2
COMPACT
LOW INERTIA
FOR SINGLE- AND DOUBLE-SIDED BELTS

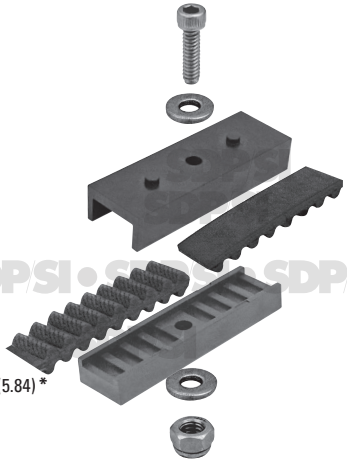

› MATERIAL:

Base & Cover - Black Polycarbonate
Hardware - 303 Stainless Steel

› SPECIFICATION:

Supplied with Hex Socket Cap Screw, Flat Washers & Elastic Stop Nut.

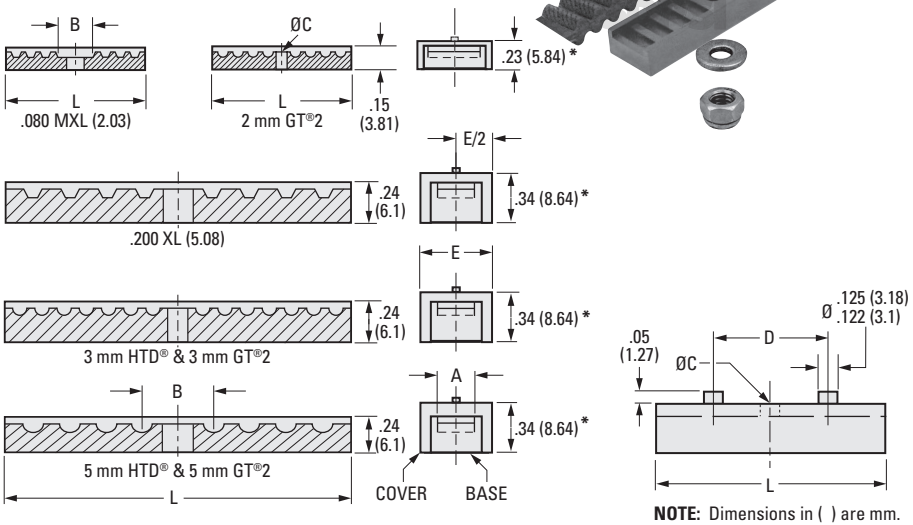

NOTE: Dimensions in ( ) are mm.

Catalog Number	Belt Width		A	B	C Dia.	D	E Cover Width	L Length
	Inch	mm						
MXL .080" Pitch								
A 6M16M030	1/8	3	.135 (3.43)	.160 (4.06)	.093 (2.36)	.500 (12.7)	.32 (8.13)	.750 (19.05)
A 6M16M045	3/16	4.5	.197 (5)				.39 (9.91)	
A 6M16M060	1/4	6	.260 (6.6)		.125 (3.18)		.45 (11.43)	
A 6M16M080	5/16	8	.322 (8.18)		.145 (3.68)		.50 (12.7)	
A 6M16M095	3/8	9.5	.385 (9.78)				.57 (14.48)	
XL .200" Pitch								
A 6M 3M060	1/4	6	.265 (6.73)	.380 (9.65)	.125 (3.18)	1.000 (25.4)	.50 (12.7)	1.880 (47.75)
A 6M 3M080	5/16	8	.327 (8.31)		.145 (3.68)		.63 (16)	
A 6M 3M095	3/8	9.5	.390 (9.91)					
GT®2 2 mm Pitch								
A 6M51M030	—	3	.130 (3.3)	.168 (4.27)	.093 (2.36)	.500 (12.7)	.32 (8.13)	.750 (19.05)
A 6M51M060		6	.250 (6.35)		.125 (3.18)		.45 (11.43)	
A 6M51M090		9	.370 (9.4)		.145 (3.68)		.57 (14.48)	
HTD® & GT®2 3 mm Pitch								
A 6M53M060	—	6	.250 (6.35)	.298 (7.57)	.125 (3.18)	1.000 (25.4)	.50 (12.7)	1.880 (47.75)
A 6M53M090		9	.370 (9.4)		.145 (3.68)		.63 (16)	
HTD® & GT®2 5 mm Pitch								
A 6M55M060	—	6	.250 (6.35)	.430 (10.92)	.125 (3.18)	1.000 (25.4)	.50 (12.7)	1.880 (47.75)
A 6M55M090		9	.370 (9.4)		.145 (3.68)		.63 (16)	
A 6M55M150		15	.605 (15.37)				.87 (22.1)	

***** Dimensions when used with single-sided belts.

©Copyright 2019 Stock Drive Products / Sterling Instrument, a Designatronics company. All rights reserved.