

INTEGRAL CLAMP HI-FLEX BELLOWS COUPLINGS



> MATERIAL:

- Hubs - Aluminum
- Bellows - Flexible Electrodeposited Nickel
- Cap Screws - Black Oxided Steel

PHONE: 516.328.3300 • FAX: 516.326.8827 • WWW.SDP-SI.COM




> FOR APPLICATIONS REQUIRING:

- Precise Adjustment
- Repositioning
- Reversal Torque Resistance
- Vibration Resistance
- Ability to Handle Large Shaft Misalignment



Other bores and finishes are available on special order.

For additional information see technical data on opposite page.

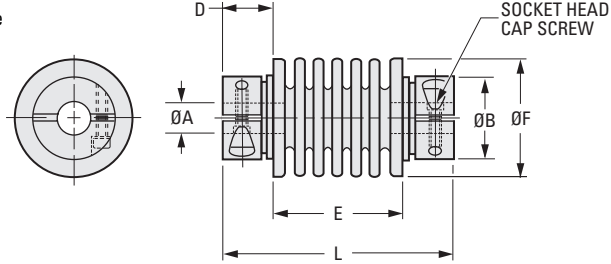

INCH COMPONENT

Catalog Number	A Bore + .001 - .000	B* Hub Dia.	F Bellows O.D.	E Bellows Length	D Hub Width	L* Overall Length	Cap Screws	Torque ozf in.	Max. Misalignment	
									Angular Offset	Lateral Offset
S9901Y-G120134	.120	.571	.500	.740	.300	1.340	M2	33	17°	.045
S9901Y-G125134	.125									
S9901Y-G125124		.188	.571	.500		.740		1.340	33	17°
S9901Y-G188134	.709							.640	.643	.501
S9901Y-G188124		.250	.571	.500		.740				
S9901Y-G188110	.709							.640	.643	.501
S9901Y-G250134		.866	.750	.540		.501				
S9901Y-G250124	.3125							1.004	1.000	1.230
S9901Y-G250110		.375	.985	.729		.729				
S9901Y-G250120	.500							1.429	1.430	.227
S9901Y-G313138		.465	1.157	.227	.916	1.885	150			
S9901Y-G313189	1.157					.227	.916	.916	1.885	150
S9901Y-G375189		1.157	.227	.916	.916				1.885	150
S9901Y-G375116	1.157					.227	.916	.916	1.885	150
S9901Y-G500116		1.157	.227	.916	.916				1.885	150
S9901Y-G500185	1.157					.227	.916	.916	1.885	150
S9901Y-G500185		1.847	1300	6°	.018					

*Dimensions of the Hub Dia. (B) and Overall Length (L) may vary slightly due to manufacturing variances. The bore size will not be affected.

